



# BALL VALVES FOR GAS

070

BERLIN® BALL VALVE, FULL FLOW

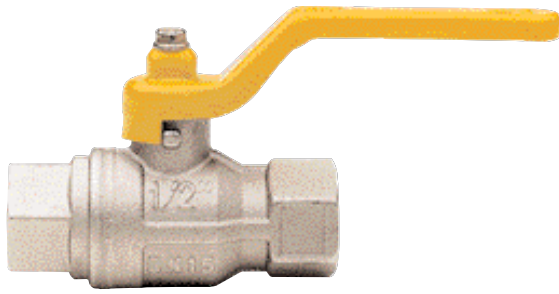


Female/female threads  
**Lever handle in steel**  
 Body in nickel-plated brass  
 Minimum and maximum working temperatures:  
 -20°C, 60°C (class T2 under EN331).  
 Threads: ISO 7/1 Rp parallel  
 (equivalent to DIN EN 10226-1 and BS21)

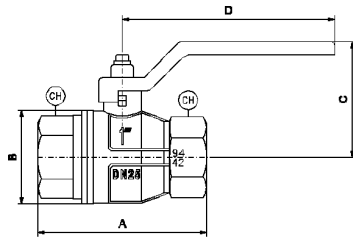


SIZE	1/2"	3/4"	1"	1"1/4	1"1/2	2"
A (mm)	75	80	90	110	120	140
B (mm)	32.5	42	49.5	59.5	72	86
C (mm)	50	59	63	77	91	97
D (mm)	89	113	113	138	157.3	157.3
CH (mm)	25	31	40	49	54	68.5
WORKING PRESSURE Kg/cm <sup>2</sup> bar	5	5	5	5	5	5
WORKING PRESSURE PSI	72.5	72.5	72.5	72.5	72.5	72.5

071

BERLIN® BALL VALVE, FULL FLOW

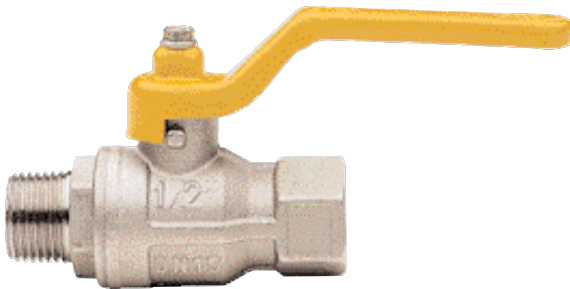

Male/female threads  
**Lever handle in steel**  
 Body in nickel-plated brass  
 Minimum and maximum working temperatures:  
 -20°C, 60°C (class T2 under EN331).  
 Female thread: ISO 7/1 Rp parallel  
 (equivalent to DIN EN 10226-1 and BS21)  
 Male thread: ISO 7/1 R taper  
 (equivalent to DIN EN 10226-1 and BS21)



SIZE	1/2"	3/4"	1"	1"1/4	1"1/2	2"
A (mm)	76.5	83.5	93	110	121	140.5
B (mm)	32.5	42	49.5	59.5	72	86
C (mm)	50	59	63	77	91	97
D (mm)	89	113	113	138	157.3	157.3
CH (mm)	25	31	40	49	54	68.5
WORKING PRESSURE Kg/cm <sup>2</sup> bar	5	5	5	5	5	5
WORKING PRESSURE PSI	72.5	72.5	72.5	72.5	72.5	72.5



ART.  
070-  
071