
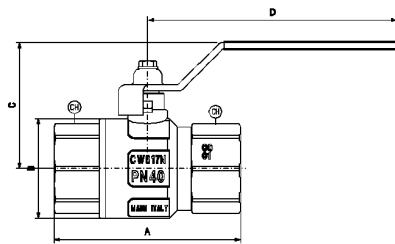


# BALL VALVES FOR GAS

266

LONDON<sup>®</sup> BALL VALVE, FULL FLOW


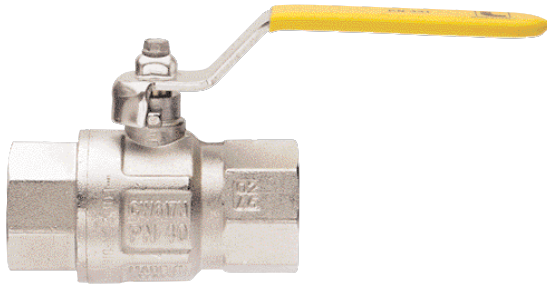


Female/female threads  
**Flat lever handle in lined steel**  
 Body in nickel-plated brass  
 Minimum and maximum working temperatures:  
 -20°C, 60°C (class T2 under EN331).  
 Threads: ISO 7/1 Rp parallel  
 (equivalent to DIN EN 10226-1 and BS21)

SIZE	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
A (mm)	49.5	52.4	61	68	85	99.5	109	130
B (mm)	23.5	24	30.5	37	45.5	58	71	85
C (mm)	41.5	41.5	49.8	56.3	60.3	76.5	92	99
D (mm)	85.5	85.5	92.5	113.5	113.5	138	158	158
CH (mm)	18	21	25	31	38	47	54	66
WORKING PRESSURE kg/cm <sup>2</sup> bar	5	5	5	5	5	5	5	5
WORKING PRESSURE psi	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5

267

LONDON<sup>®</sup> BALL VALVE, FULL FLOW

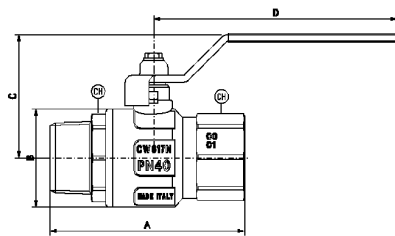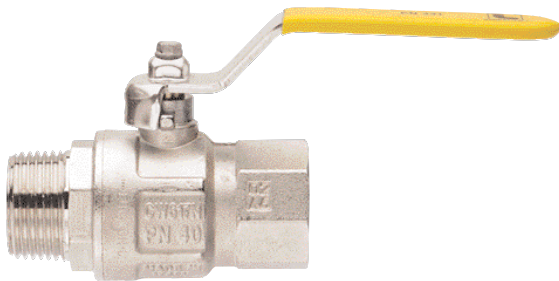

Male/female threads  
**Flat lever handle in lined steel**  
 Body in nickel-plated brass  
 Minimum and maximum working temperatures:  
 -20°C, 60°C (class T2 under EN331).  
 Female thread: ISO 7/1 Rp parallel  
 (equivalent to DIN EN 10226-1 and BS21)  
 Male thread: ISO 7/1 R taper  
 (equivalent to DIN EN 10226-1 and BS21)

SIZE	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
A (mm)	56.9	58.9	68	75.5	90.5	105	115.5	135.5
B (mm)	23.5	24	30.5	37	45.5	58	71	85
C (mm)	41.5	41.5	49.8	56.3	60.3	76.5	92	99
D (mm)	85.5	85.5	92.5	113.5	113.5	138	158	158
CH (mm)	18	21	25	31	38	47	54	66
WORKING PRESSURE kg/cm <sup>2</sup> bar	5	5	5	5	5	5	5	5
WORKING PRESSURE psi	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5



ART.  
266-  
267