


103 YORK® CHECK VALVE



SUITABLE FOR DOMESTIC WATER SERVICES, HEATING AND AIR-CONDITIONING PLANTS, COMPRESSED AIR SYSTEMS. IT CAN BE INSTALLED IN ANY POSITION: VERTICAL, HORIZONTAL, OBLIQUE.

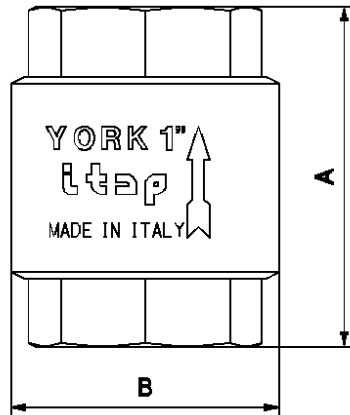


Body in brass
 Plate in nylon
 Seal in NBR
 Spring in stainless steel
 Minimum and maximum working temperatures:
 -20°C, 100°C
 Threads: ISO228
 (equivalent to DIN259 and BS2779)

SIZE	3/8"	1/2"	3/4"	1"	1"1/4"	1"1/2"	2"	2"1/2"	3"	4"
A (mm)	46.5	47	53	60.5	66.5	74	80	98	103	118.5
B (mm)	34.5	34.5	42	47.5	59.5	70.5	86	102	125	154
WORKING PRESSURE Kg/cm ² bar	12	12	12	12	10	10	10	8	8	8
WORKING PRESSURE PSI	170	170	170	170	140	140	140	110	110	110

108 YORK® FOOT VALVE



SUITABLE FOR DOMESTIC WATER SERVICES, HEATING AND AIR-CONDITIONING PLANTS, COMPRESSED AIR SYSTEMS. IT CAN BE INSTALLED IN ANY POSITION: VERTICAL, HORIZONTAL, OBLIQUE.

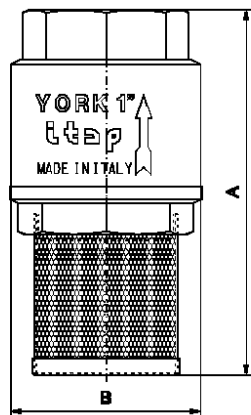

Body in brass
 Plate in nylon
 Seal in NBR
 Spring in stainless steel
 Strainer in nylon and stainless steel
 Filtration degree:
 -3/8" through 2": 1200µm
 -2" through 4": 2000 µm
 Minimum and maximum working temperatures:
 -20°C, 100°C
 Threads: ISO228
 (equivalent to DIN259 and BS2779)

SIZE	3/8"	1/2"	3/4"	1"	1"1/4"	1"1/2"	2"	2"1/2"	3"	4"
A (mm)	69.5	69.5	82	91.5	108	119	136.5	164.5	184.5	214.5
B (mm)	34.5	34.5	42	47.5	59.5	70.5	86	102	125	154
WORKING PRESSURE Kg/cm ² bar	10	10	10	10	8	8	8	6	6	6
WORKING PRESSURE PSI	140	140	140	140	110	110	110	90	90	90

