



# TCF-UK



## Multipurpose hose.

Three layer design, in flexible, clear PVC, with high resistant polyester fibre reinforcement.

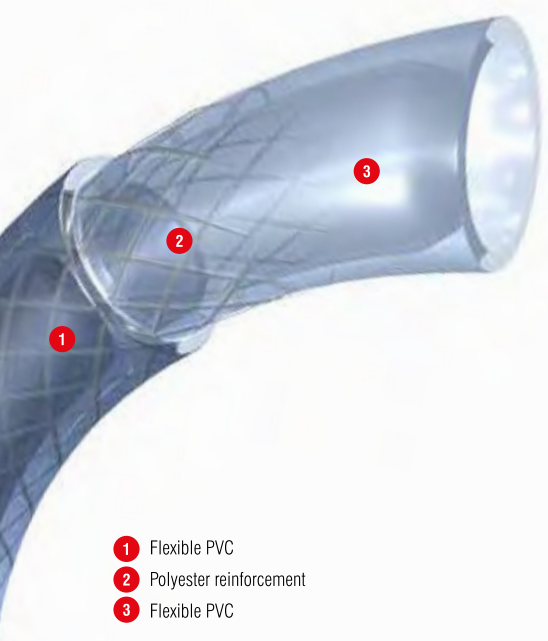

- 1 Flexible PVC
- 2 Polyester reinforcement
- 3 Flexible PVC

### SIMULANTS A, B, C, D1

- fruit juices
- wines
- alcohols
- milk



### APPLICATIONS

- Multipurpose hose suitable for numerous applications :
- Compressed air hose for supplying pneumatic tools
  - For equipping assembly work stations, wall-mounted or mobile dispensers, compressors

### ALL SECTORS OF ACTIVITY

- Automotive industry
- Assembly plants
- Plastics industry
- Construction
- Garages (for cars, lorries & agricultural machinery)
- Woodworking etc.

### Marking

Ø inn x Ø out / Ø inn x th. (EU) No 10/2011 SIM A,B,C,D1 [Batch number]

### ADVANTAGES

The materials used in TCF provide it with flexibility, high transparency, UV protection. Moreover, its balanced reinforcement provides good resistance to pressure and deformation at low pressures.

### CONNECTORS

Quick connectors, swaged connectors, barbed or serrated connectors. band, worm drive, screw or butterfly clamps.

### CHEMICAL RESISTANCE

TCF is suitable for various acids and alkalis. For more information please consult table pages 104 to 107 column A.

### WARNING

Hydrocarbons make TCF quickly degrade. Please consult us.



↻ mm	+/- mm	↻ mm	+/- mm	↻ mm	g/m	bar	bar	↻ mm	Transparent 30 m
6.3	+/- 0,3	10.5	+/- 0,5	2.1	67	40	13	50	TR-149614
8	+/- 0,4	12	+/- 0,6	2	75	40	13	65	TR-149645
10	+/- 0,4	14	+/- 0,6	2	90	40	13	80	TR-149671
12.5	+/- 0,5	17.5	+/- 0,7	2.5	142	40	13	110	TR-149689
16	+/- 0,8	22	+/- 0,8	3	208	40	13	145	TR-149697
19	+/- 0,8	24	+/- 0,8	2.5	203	40	13	174	TR-149707
25	+/- 0,8	31	+/- 1,0	3	317	40	13	260	TR-149737
32	+/- 0,8	40	+/- 1,0	4	548	36	12	350	TR-149787
38	+/- 1,0	46	+/- 1,2	4	634	33	11	400	TR-149806
50	+/- 1,0	60	+/- 1,2	5	1056	24	8	500	TR-149882