


Cim 17G

FULL BORE BALL VALVE FOR GAS- TYPE T16 - STEEL LEVER HANDLE



It is made of a brass alloy that complies with standard EN 12165-CW617N-M.


FLOW AND PRESSURE DROP

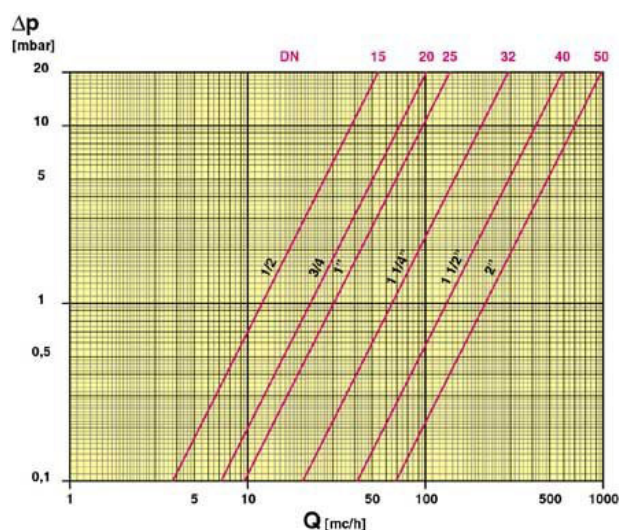

Flow and pressure drop
 1 l/min = 0,06 m³/h
 1 m³/h = 16,67 l/min

PRESSURE TEMPERATURE RATINGS

TECHNICAL DRAWING

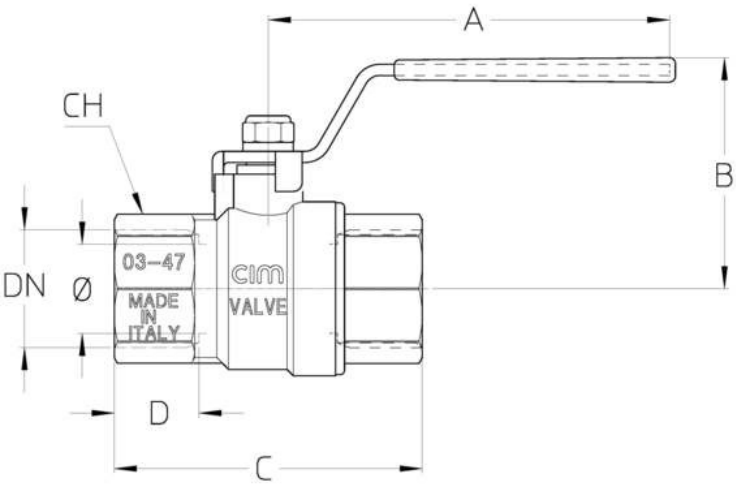

DN	1/2"	3/4"	1"	1"1/4	1"1/2	2"
Φ mm	15	20	25	32	40	50
Grms.	200	315	500	800	1250	1860
A	90	90	110	110	150	150
B	48	52	57	66	81	88
C	62	69	84	96,5	109,5	131
D	17,5	19	22	25	25	29
CH	25	31	38	47	54	66

KV = capacity in m³/h at pressure drop of 1 mbar. Element gas sg=0,6
CM = Working torque in Nm.
CS = Starting torque in Nm.
MT = Maximum torque on the stem in Nm.

TECHNICAL CHARACTERISTICS